


Neoprene flame retardant C34 rubber

SPECIFICATION SHEET

ELASTOMER	-	NEOPRENE
COLOUR	-	BLACK
QUALITY	-	NCB 158 / P92—507 CLASS M2 FLAME RETARDANT
GRADE	-	C34
HARDNESS	-	70° SHORE A
S.G.	-	1.47G/CM ³
TENSILE MP _A	-	20
ELONGATION	-	250%
TEAR STRENGTH	-	20 KG/CM
COMPRESSION SET	-	20%
ABRASION RESISTANCE	-	-
OPERATING TEMPERATURE	-	-30/+120°C

QUALITY ASSURED PRODUCTS WITH FULL TRACEABILITY

Care should be taken in selecting the most suitable quality for each application.
Advice is available but final responsibility remains with the customer.

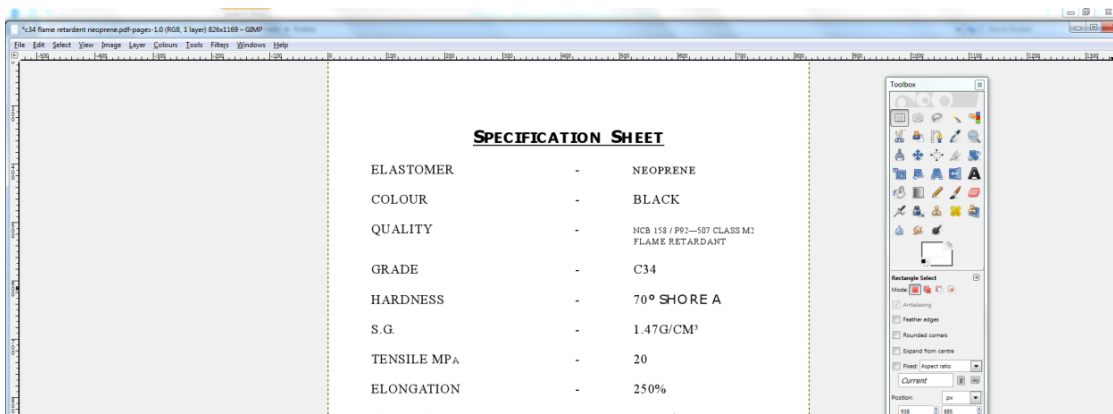

Find out more at jaharrison.co.uk