



Maxiflex LD

- *Spiral wound gaskets have the ability to recover under the action of fluctuating loads caused by process fluid pressure and temperature changes, flange face temperature variations, flange rotation, bolt stress relaxation and creep.*
- *The gasket-sealing element consists of a pre-formed metallic winding strip with layers of a softer, more compressible sealing material which, during compression, is densified and flows to fill imperfections in the flange surfaces when the gasket is seated. The metal strip holds the filler giving the gasket mechanical resistance and resilience.*
- *The Maxiflex spiral wound gasket combines the excellent sealing properties of graphite with the strength and integrity of metallic gaskets. The spiral wound gasket is very widely used and represents a cost effective and reliable gasket. Some ASME class 150 flanges are regarded as underbolted and the bolting area is relatively small compared to the compressed area of the gasket. Klinger has developed Maxiflex Low Density for use on flanges with low gasket stress.*
- *Maxiflex LD features a sealing element with thicker sealing material and hence reduces the volume of steel in the sealing element and therefore lowers the installation stress needed to seal the gasket.*
- *Maxiflex LD offers high integrity sealing performance coupled with the seating requirements of a compressed fibre gasket.*

Availability

Maxiflex LD can be manufactured to ASME class 150 & 300 and supplied in accordance with ASME B16.20.

Maxiflex LD can be manufactured from a wide range of materials to suit all applications utilising graphite or PTFE filler material.


Winding Material	Maximum Temperature	ASME B16.20 Colour Coding
Carbon Steel	500°C	Silver
304 Stainless Steel	650°C	Yellow
316L Stainless Steel	800°C	Green
Duplex	800°C	N/A
347 Stainless Steel	870°C	Blue
321 Stainless Steel	870°C	Turquoise
Monel 400	800°C	Orange
Nickel 200	600°C	Red
Titanium	540°C	Purple
Hastelloy B-2	1000°C	Brown
Hastelloy C-276	1000°C	Beige
Inconel 600	1000°C	Gold
Inconel 625	1000°C	Gold
Inconel X-750	1000°C	Light Grey
Incoloy 825	1000°C	White
Zirconium 702	500°C	N/A






KLINGER Maxiflex LD

Maxiflex LD spiral wound gaskets are available in a range of configurations and materials. Below are the most common gasket types.




Type R

- Maxiflex spiral wound sealing element
- Wide choice of materials for filler and metal strip
- Suitable for high pressure and temperature applications
- Recommended flanges - tongue and groove, male to female and flat face to recess
- General and critical duties




Type CR

- Maxiflex spiral wound sealing element
- Solid metal outer ring used as a centring device and compression stop
- Used mainly on raised face and flat face flanges
- General Duties




Type RIR

- Maxiflex spiral wound sealing element
- Solid metal inner ring
- High pressure temperature capability
- Male to female flanges
- General and critical duties




Type CRIR

- Maxiflex spiral wound sealing element
- Solid metal inner & outer ring
- Suitable for high pressure and temperature applications
- Raised face or flat flanges
- Prevents turbulence and erosion damage to flange
- Prevents damage to the gasket bore and inner windings
- Acts as a heat shield
- Acts as a corrosion barrier
- General and Critical Duties



Type RHD

- Maxiflex spiral wound sealing element
- Covered with 0.5mm Graflex
- Used on manhole covers
- Low bolt load applications
- Uneven sealing faces
- Double integrity seal

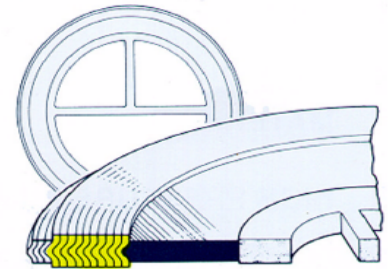

Type HTX

- (For heat exchanger applications)
- Maxiflex spiral wound sealing element
 - A combination of inner and outer rings
 - The inner ring could have pass bars or could carry either a metal clad or soft gasket with pass bars
 - Manufactured to customer designs

All information and recommendations contained in this specification sheet are to the best of our knowledge correct. Since conditions of use are beyond our control, users must satisfy themselves that the products are suitable for the intended processes and uses. No warranty is given or implied in respect of information or recommendations or that any use of products will not infringe rights belonging to other parties. In any event or occurrence our liability is limited to our invoice value of the goods delivered by us to you. We reserve the right to change product design and properties without notice

